
EXPRESS 4

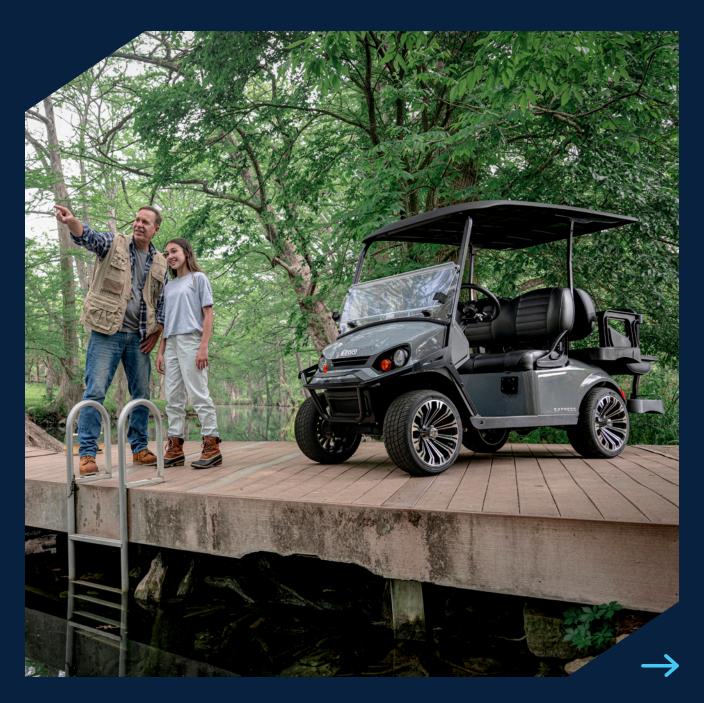

Enjoy Every Ride.

The E-Z-G0° Express" 4 will make every ride a joyride. Outfitted with ungraded features, sleek styling, and enhanced performance and maneuverability, the Express 4 boosts every aspect of your ride experience.

ELITE® LITHIUM POWERTRAIN OR 13.5-HP EFI GAS ENGINE

PREMIUM INTERIOR

NEW MODULAR CANOPY



EXPRESS 4

Key Features

- Spacious Legroom and **Operator Area**
- Stylish Dash with Versatile Storage Areas
- Convertible Rear Seat with **Built-In Storage**
- Premium Modular Canopy with Integrated Gutter System
- Fold-Down Windshield
- Packages Customized for **Every Rider**
- DC/DC Converter (ELiTE Only)
- LED Headlights, Taillights and Brake Lights

Commuter Package

- Kruizer SBR Tire on 14" SPDR Alloy Wheel
- Multifunction Gauge (ELiTE only)
- Fuel Gauge (Gas only)
- Premium Interior
- Turn Signals with Horn
- · Lifted Ride Height
- Large Fender Flares

Connect Package

- Hole-N-One Tire on 12" Rogue Alloy Wheel
- Multifunction Gauge (ELiTE only)
- Fuel Gauge (Gas only)
- Brushguard
- · Standard Ride Height

Cruiser Package

- Paramount SBR Tire on 14" FTV Alloy Wheel
- Multifunction Gauge (ELiTE only)
- Fuel Gauge (Gas only)
- Premium Interior
- Turn Signals with Horns
- Brushguard
- Standard Ride Height

Adventure Package

- Paramount M/T Tire on 14" Black Steel Wheel
- Multifunction Gauge (ELiTE only)
- Fuel Gauge (Gas only)
- Large Fender Flares
- Black Logos & Emblems
- · Lifted Ride Height

Explorer Package

- Paramount M/T Tire on 14" Black SPDR Alloy Wheel
- Large Fender Flares
- Brush Guard
- Multifunction Gauge (ELiTE only)
- Fuel Gauge (Gas only)
- Premium Interior
- Black Logos & Emblems
- Lifted Ride Height

Color Options













Flame Red



Inferno Red



Platinum







Ocean Grey

Limited Edition Solar Flare







DIMENSIONS	STANDARD	LIFTED	STANDARD	LIFTED
OVERALL LENGTH	116.5 in (296 cm)	115 in (292 cm)	116.5 in (296 cm)	115.6 in (293 cm)
OVERALL WIDTH	48.75 in (124 cm)	49.6 in (126 cm)	48.75 in (124 cm)	48.5 in (123 cm)
OVERALL HEIGHT (W/O ROOF)	48.75 in (124 cm) (Top of Steering Wheel)	52.0 in (132 cm) (Top of Steering Wheel)	49.13 in (125 cm) (Top of Steering Wheel)	52.5 in (133 cm) (Top of Steering Wheel)
OVERALL HEIGHT (W/ ROOF)	72.25 in (184 cm)	81.9 in (208 cm)	72.13 in (183 cm)	83.0 in (210 cm)
WHEEL BASE	65.25 in (166 cm)	67.4 in (171 cm)	64.13 in (163 cm)	65.5 in (166 cm)
FRONT WHEEL TRACK	35 in (88.9 cm)	37.9 in (96.3 cm)	35.25 in (89.5 cm)	38.5 in (98 cm)
REAR WHEEL TRACK	38.88 in (98.7 cm)	39.2 in (99.6 cm)	39 in (99 cm)	38.5 in (98 cm)
GROUND CLEARANCE @ DIFFERENTIAL	5.63 in (13 cm)	7.3 in (18.5 cm)	5.13 in (13 cm)	6 in (15 cm)

POWER			
POWER SOURCE	56.7 V	4-Cycle 24.5 in ³ (401 cc)	
VALVE TRAIN	N/A	Single Cylinder OHV	
MOTOR TYPE	56 Volt AC	N/A	
FUEL SYSTEM	N/A	Closed-loop electronic fuel injection	
HORSEPOWER (KW)	11.7 HP (8.7 kW) Peak	13.5 hp (10.1 kW) Exceeds SAE J1940 Standard	
ELECTRICAL SYSTEM	56 Volt	Starter / Generator. Solid State Regulator	
BATTERIES (QTY/TYPE)	Single, 56 V Li-Ion (Standard Configuration)	12-Volt Maintenance-Free (525 CCA, 85 minute reserve)	
KEY OR PEDAL START	Pedal Start		
AIR CLEANER	N/A	Replaceable Dry Cartridge	
LUBRICATION	N/A	Pressurized Oil System	
OIL FILTER	N/A	Spin-On	
COOLING SYSTEM	N/A	Air Cooled	
FUEL CAPACITY	N/A	5.96 Gallon (22.6 L)	
BATTERY CHARGER	56VDC, 120/230 VAC, UL/CSA, CE	N/A	
SPEED CONTROLLER	235 Amp AC	N/A	
DRIVETRAIN	Motor Shaft Direct Drive	Automatic, Continuously Variable Transmission (CVT)	
TRANSAXLE	Clutch-Type Limited-Slip Differential with Helical Gears (ELITE Only) Differential with Helical Gears (Gas Only)		
GEAR SELECTION	Dash Mounted Forward-Neutral-Reverse		

PERFORMANCE

REAR AXLE RATIO

FERIORMANCE				
SEATING CAPACITY	4-Passenger			
DRY WEIGHT	880 lb (399 kg) (Without Batteries)	918 lb (416 kg) (Without Batteries)	935 lb (424 kg) (Without Battery)	1061 lb (481 kg) (Without Battery)
CURB WEIGHT	924 lb (419 kg)	965 lb (437 kg)	975 lb (442 kg)	1101 lb (499 kg)
VEHICLE LOAD CAPACITY	800 lb (360 kg)			
OUTSIDE CLEARANCE CIRCLE	19 ft (5.79 m)		22 ft (6.7 m)	
SPEED (LEVEL GROUND)	Up to 19 mph \pm 0.5 mph (Up to 30.6 kph \pm 0.8 kph)			

17:1 (Forward)

STEERING & SUSPENSION

STEERING	Self-Compensating Rack and Pinion		
SUSPENSION	Leaf Springs with Hydraulic Shock Absorbers		
SERVICE BRAKE	Rear Wheel Mechanical Self-Adjusting Drum		
PARKING BRAKE	Automatic Electro-Magnetic (ELiTE Only)	Self-Compensating, Single Point Engagement (Gas Only)	
TIRES	Hole-N-One Tire on Rogue 12 Paramount SBR Tire on 14" F L Paramount M/T Tire on 14" Black Kruizer SBR Tire on 14" SPDR	andard: "Alloy Wheel (Connect Package), TV Alloy Wheel (Cruiser Package) ifted: k Steel Wheel (Adventure Package) Alloy Wheel (Commuter Package), SPDR Alloy Wheel (Explorer Package)	

BODY & CHASSIS

BODY & CHASSIS			
FRAME	Welded Steel with E-Coat & DuraShield™ Powder Coat		
BODY & FINISH	Injection Molded TPO		
AVAILABLE BODY COLORS	Black, Bright White, Electric Blue, Flame Red, Inferno Red, Metallic Charcoal, Ocean Grey, Platinum, Slate		
AVAILABLE SEAT COLORS	Black, Grey on Black, White on Beige		
AVAILABLE PREMIUM SEAT COLORS	Black, Grey, Mushroom		



11.47:1 (Forward) 14.35:1 (Reverse)



